


Features

- 4-ch video input
- Third-party network camera supported
- HDD quota and group management
- Up to 5 Megapixels resolution recording
 - HDMI and VGA output at up to 1920x1080P resolution
- 4-ch synchronous playback

Technical Specifications

Model No.	NVR-5204
Video/Audio input	
Video compression	H.264
Video input	4-Ch
Incoming Bandwidth	20 Mbps
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Video /Audio output	
HDMI output	1-ch, resolution: 1920 x 1080P /60 Hz ,1600 x 1200 /60 Hz, 1280 x 1024 /60 Hz, 1280 x 720 /60 Hz, 1024 x 768 /60 Hz
VGA output	1-ch, resolution: 1920 x 1080P /60 Hz ,1600 x 1200 /60 Hz, 1280 x 1024 /60 Hz,1280 x 720 /60 Hz, 1024 x 768 /60 Hz
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 x 576, NTSC: 704 x 480
Video spot output	N/A
Encoding resolution	5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Frame rate	30 fps
Video bit rate	32 Kbps ~ 8192 Kbps, or user defined (Max. 8192 Kbps)
Audio output	1-ch, RCA (Linear, 600 Ω)
Audio bit rate	16 Kbps
Dual-stream	Support (Sub-stream at CIF / QCIF: 30fps)
Stream type	Video, Video & Audio
Playback resolution	5MP / 3MP / 1080P / UXGA / 720P / 4CIF / VGA / DCIF / 2CIF / CIF / QCIF
Synchronous playback	4-ch 720P/1080P / 1-ch 5MP
Hard Disk	
SATA	1 SATA interfaces
Capacity	Up to 4TB capacity for each disk
Interface	
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface
Web Browser	IE 7, IE 8, IE 9, Chrome 8 +, Firefox 3.5 +, Safari 5 +
Serial interface	1 RS-485 half-duplex interface
USB interface	2 x USB2.0
Alarm in/out	N/A
General	
Power supply	12 VDC
Consumption	≤10 W
Working temperature	14°F - 131°F
Working humidity	10% ~ 90%
Chassis	Stand-alone 1U Chassis
Dimensions	315 x 230 x 45mm
Weight	< 2 Kg

Rear Panels

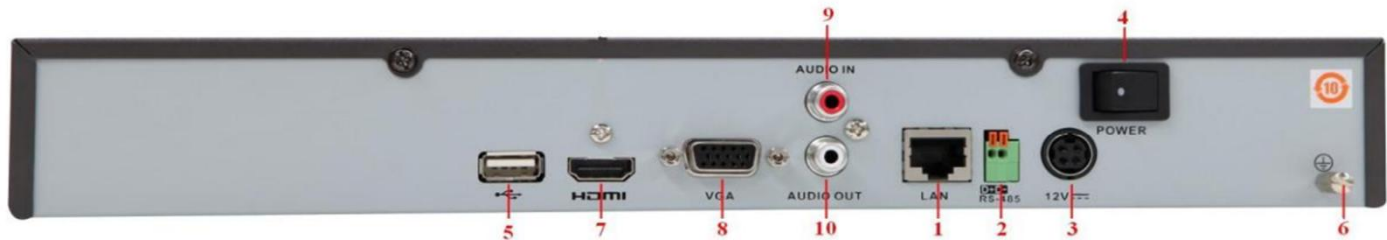

1. LAN Network Interface
2. RS-485 Interface
3. 12VDC Power Input
4. Power Switch
5. USB Interface
6. GND
7. HDMI Interface
8. VGA Output
9. Audio In
10. Audio Out

For more information please contact Protection Depot
Toll Free: 1-877-669-6368 - Email: sales@protectiondepot.com